

PECIFICATION AND FEATURES

DESCRIP	TION					
	Can size:	Ø160/146 x	160	Customer:	General	
	Closure: Customer end:	n.a. n.a.		Type: Pallet type:	Strijkvaatje Euro	
	Internal body	/ coating:	Plain			
BODY	Material Thickness Tin coating		Tinplate not specified not specified	EAR	Material Thickness Tin coating	Tinplate 0.28 E2,8/2,8
	Code Side seam Side stripe ir	nside	strijkvaatje Welded	BAIL HANDLE	Feature	2 Welded ears
	Coating inside		Plain		Material	Zinc coated wire 2.8 mm
	Coating outside		Plain/lacquered/dec orated		Feature	Trapezoidal shape
воттом	Material Thickness Tin coating Code Compound to Coating inside Coating outs	de	Tinplate not specified not specified 716 UW TDV 791 Plain Plain			
	•	CCS accordin	g to EN10202 ISIONS			
H	Mass +/- 5%	Nom.	Brimfull volume acc. ISO 90/2	Location bail handle	Factory finished can height	

Н	Mass	Nom.	Brimfull volume	Location	Factory finished
	+/- 5%	volume	acc. ISO 90/2	bail handle	can height
	(g)	(ml)	(ml)	(mm)	(mm)
160	not specified	2500	2970	35 ± 5	160 ± 0,5

OTHER


CONTAINER PERFORMANCE

As product compatibility is the responsibility of the customer, Mus Verpakkingen BV gives no fit for purpose warranty and recommends that pack tests are performed prior to filling and would be pleased to provide technical support on this subject prior to purchase

9000	ne Quality Assurance System has been approved by Lloyd's Register Quality Assurance 150 000				ecifications reserved
	Date:	25-7-2016	Size:	Ø160/146 x 160	General
	Author:		Type:	Strijkvaatje	



)rawings

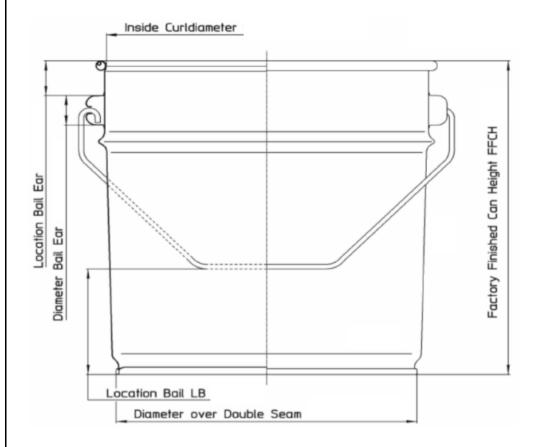

DIMENSIONS

Inside curl diameter	158,15 ± 0,05	Location Bail Ear	21-22
Diameter over double seam	148,00 ± 0,25	Diameter Bail Ear	18,34 ± 0,20

Code: strijkvaatje

CAN DRAWING

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9000				Modification o	f specifications reserved
	Date:	25-7-2016	Size:	Ø160/146 x 160	General
	Author:		Type:	Strijkvaatje	



'ackaging details

Pallet type: Euro


Packaging method: Cans stacked, covered by cardboard and wooden frame

Coverage: Shrink film

Can	no. of stacks	no. of cans	Total no. of cans	Total pallet
height		per stack	per pallet	height
160	3x7+2x6	18	594	1205

Remark(s):

Pattern

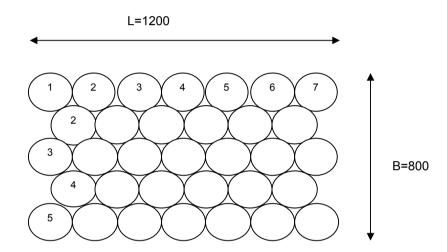

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9000

Modification of specifications reserved


Date:	25-7-2016	Size:	Ø160/146 x 160	General
Author:		Type:	n.a.	



Appendix: Additional information

Location of bail ear

Optional: Detection Dimple



The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9000				Modification o	f specifications reserved
	Date:	25-7-2016	Size:	Ø160/146 x 160	General
	Author:		Type:	n.a.	