

SPECIFICATION AND FEATURES

DESCRIPTION	
Can size: Ø70 x 35 x 127 Closure: PLK REL 24 Type: Cap 24 REL UN Coating: plain	Customer: - Type: Rectangle can Pallet type: Euro
BODY	TOP
Material: Tinplate Thickness: 0.20 Tin coating: E2,8/2,8 Code: 6422 Side seam: Welded Side stripe inside: - Coating inside: plain Coating outside: plain/lacquered/decorated	Material: Tinplate Thickness: 0.30 Tin coating: E2.8/2.8 Code: 932QX Compound type: Synthetic rubber Coating inside: plain Coating outside: plain
BOTTOM	
Material: Tinplate Thickness: 0.30 Tin coating: E2.8/2.8 Code: 954QX Compound type: Synthetic rubber Coating inside: plain Coating outside: plain	

Remark: Tinplate according to EN10202

CAPACITIES, WEIGHTS AND DIMENSIONS

H	Mass (g) +/- 5% (g)	Nom. volume (ml)	Brimfull volume acc. ISO 90/2 (ml)	Label height (mm)	Height over double seam (mm)	Size over double seam (mm)
127	56.1	250	276	121.7 ± 0,65	127.3 ± 0,35	72,4 x 37,5 ± 0,4

OTHER:

- Closure has to be pressed in with a pneumatic driven flat pusher plate. Please beware that enough air pressure is used
- UN mark in bottom: UN/3A1/Y1.2/200--/NL/IMP-L2609

CONTAINER PERFORMANCE

As product compatibility is the responsibility of the customer, Mus Verpakkingen BV gives no fit for purpose warranty and recommends that pack tests are performed prior to filling and would be pleased to provide technical support on this subject prior to purchase

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9001


Modification of specifications reserved

Date: 29-1-2014
Author: H. Schell

Size: Ø70 x 35 x 127
Type: Cap 24 REL UN

-

Drawings

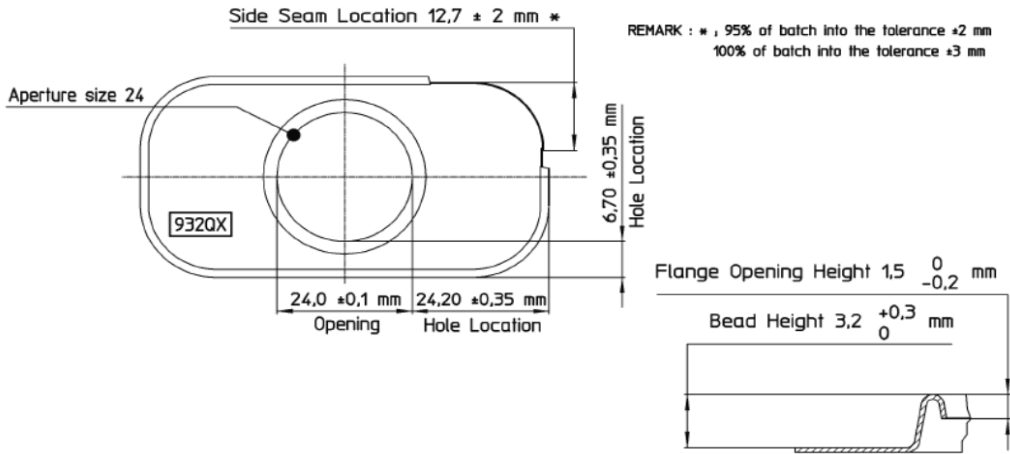

CAP

Code: 932QX



CAN DRAWING

Code: 6422

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9001

Modification of specifications reserved

Date: 29-1-2014
Author:

Size: $\varnothing 70 \times 35 \times 127$
Type: Cap 24 REL UN

-

Packaging details


Pallet type: Euro
 Packaging method: Cans in layers, separated by cardboard sheets
 Coverage: Stretch film

Can height	no. of cans per layer	no. of layers	Total no. of cans per pallet	Total pallet height
127	31x11=341	8	2728	1195

Remark(s):

Pattern

Pay attention to the position of the fill openings.

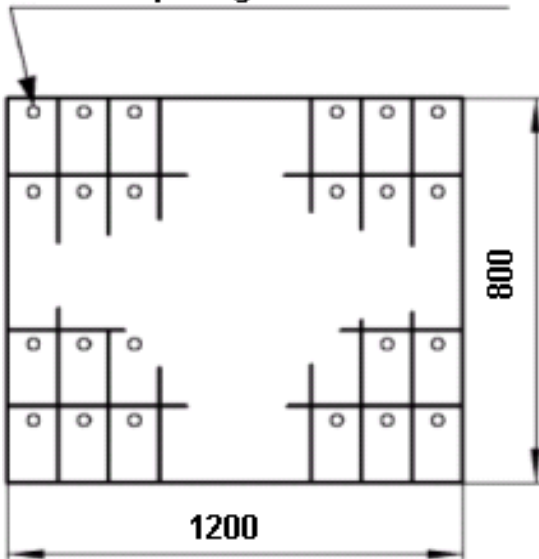

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9001

Modification of specifications reserved

Date: 29-1-2014

Size: Ø70 x 35 x 127


-

Author:

Type: Cap 24 REL UN

Appendix: Additional information

Remarks: UN code

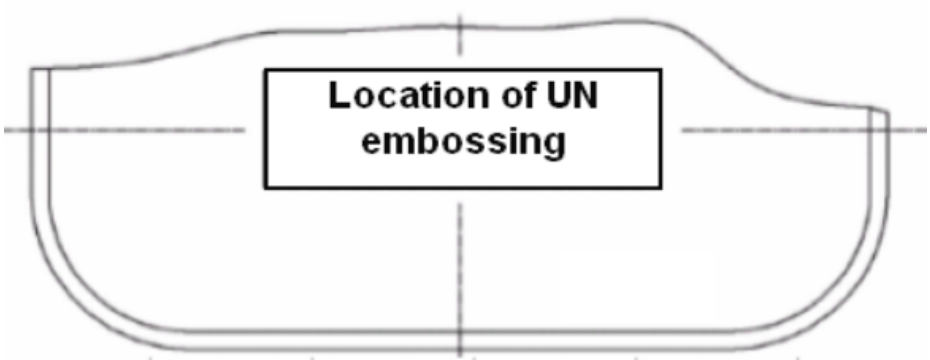

The Quality Assurance System has been approved by Lloyd's Register Quality Assurance ISO 9001		Modification of specifications reserved	
Date:	29-1-2014	Size:	Ø70 x 35 x 127
Author:		Type:	Cap 24 REL UN